


NEAPOLITAN SMALL DOUBLE FOUNTAIN C3650 WITH PLUMBING DETAIL (X342A)

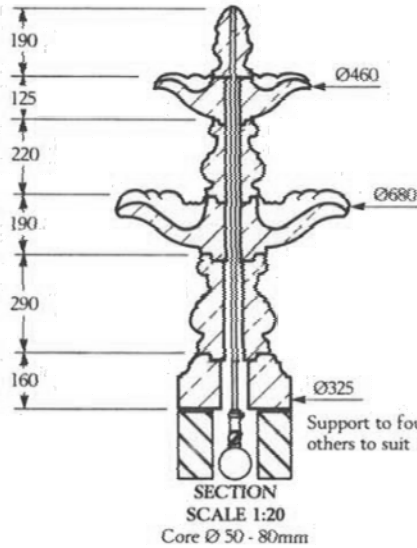

Consult a qualified electrician to ensure electrical supply conforms with all regulations/codes.

To guard against frost damage, drain off the water before winter and do not replace it until the hard frosts are past in the following spring.

We recommend that a step ladder is used when cleaning and maintaining the fountain, a ladder should not be leant against the bowl.

BEDDING JOINTS - Use 1:1:6 cement/lime/sand mortar (sand to B.S. 882 grade F)
We recommend a water proofing agent is added to mortar.

NOTE: For security and additional safety it is recommended that individual components are fixed together using a proprietary polyester or epoxy adhesive, eg. Fosroc Expandite Nitomortar PE Resin, SBD Certite or similar.

POINTING - Joints should be pointed using our proprietary pre-prepared dry mix in accordance with the recommended instructions printed on bags. Or use 1:1:6 cement/lime/sand mortar (sand to B.S. 882 grade F), colour toned to suit (white cement may be necessary).


PLUMBING COMPONENT LISTING:

Jubilee clip 1/2"	x1
Clear 1/2" PVC pipe	1m
15mm Copper pipe	

All piping to be cut on site.

To ease connections, hot water may be used to soften PVC pipes.

Unless otherwise stated, all materials other than stonework to be supplied by others.

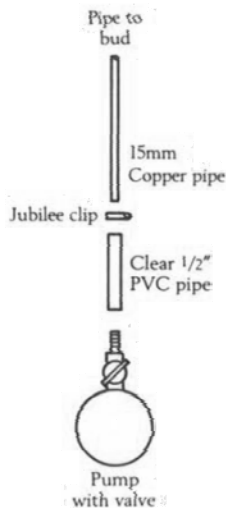

Pump extra - see Price List

Allow 6mm for bedding joints.